


# MicroFill™ Dispenser

BioTek's MicroFill™ offers an economical, compact and reliable alternative to other microplate dispensers. The microprocessor-controlled syringe pump provides accurate and precise dispensing without the time-consuming recalibration, cassette replacement, and maintenance commonly associated with other dispensers.

The entire fluid path is autoclavable for those applications requiring sterility. User-controlled dispense flow rates allow low- to high-velocity dispensing for both biochemical and cell-based assays in 24-, 96-, and 384-well standard and low-profile microplates. Deep well blocks are also accommodated with flexible volume ranges from 5  $\mu$ L to 6 mL per well.



## Superior Performance:

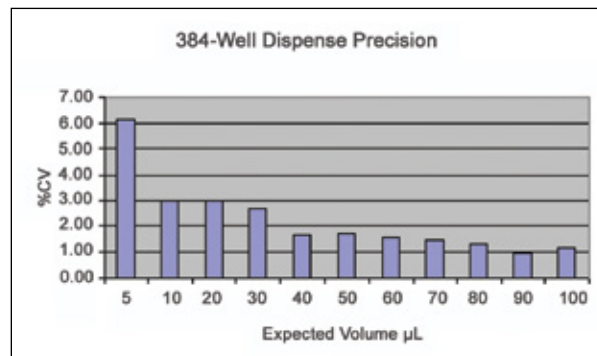


MicroFill repeatedly delivers reagents across a range of sample viscosities. Typical performance is 1.5% CV at 80  $\mu$ L.

## Features:

- 24-, 96-, and 384-well microplates
- Unique carrier design accommodates standard height and deep-well microplates
- Microprocessor-controlled syringe pump guarantees optimal precision and accuracy
- No calibration required
- Organic solvent compatible
- Up to 75 programs stored onboard
- Fully autoclavable fluid path
- Built-in maintenance routines
- Unattended operation with BioStack™ and 3rd party automation

## Sterile Fluid Path:

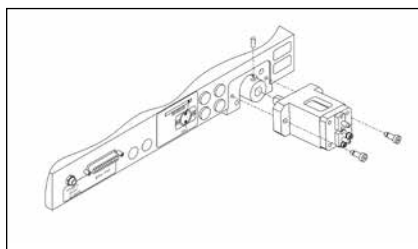

MicroFill's autoclavable syringe pump is quickly changed for guaranteed sterility and no reagent carryover.

## Typical Applications:

- Primary and secondary screening assays
- Compound storage
- Genomics and proteomics research
- Cell-based assays
- ELISAs

## Configurations:

AF1000A: MicroFill, 24-, 96-, and 384-well microplates and autoclavable fluid path

See website or price list for complete configuration listings and descriptions.

## Optional Accessories:

- Manifold for 24-well microplates
- Manifold for 96-well half-area and PCR microplates
- Organic solvent tubing set
- Product Qualification Package
- BioStack™ Microplate Stacker

## Specifications:

### General

Number of reagents:	1
Microplate types:	24, 96 and 384 wells in low profile, standard and deep well formats PCR plates, Microtubes
Soak time:	Programmable in minutes and seconds, up to 60 minutes
Safety/convenience/maintenance:	Pre-programmed maintenance routines
Automation:	Compatible with BioStack™ and 3rd party automation
Onboard software:	Create, edit or run multiple protocols
Software:	Interface software (optional) for robotic system integration

### Dispensing – Syringe Pump

Dispensing speed:	10 $\mu$ L/well, 96 wells, 1x16: 4 sec 5 $\mu$ L/well, 384 wells, 1x16: 7 sec
Manifold types:	<u>24-well dispensing:</u> One 8-tube (1 x 8) manifold – 316 stainless steel tubes <u>96-well dispensing:</u> One 8-tube (1 x 8) manifold – 316 stainless steel tubes <u>96-/384-well dispensing:</u> One 16-tube (1 x 16) manifold – 316 stainless steel tubes
Volume range:	5 – 6,000 $\mu$ L/well (manifold dependent)
Fluid delivery:	One positive displacement syringe drive
Flow rates:	1 – 5
Dispense accuracy:	$\pm$ 1 $\mu$ L at 5 $\mu$ L $\pm$ 1 $\mu$ L at 20 $\mu$ L $\pm$ 1% at 100 $\mu$ L
Dispense precision:	$\leq$ 5% CV at 5 $\mu$ L $\leq$ 2.5% CV at 20 $\mu$ L $\leq$ 1% CV at 100 $\mu$ L
Minimum prime volume:	10 mL
Supply bottle:	1 L
Sterilization:	<u>Autoclave:</u> Up to 50 cycles at temperatures and pressures of 121 °C and 1 bar (750 mmHg) <u>Chemical:</u> 70% ethyl or isopropyl alcohol and 0.5% sodium hypochlorite solution

### Physical Characteristics

Power:	100 – 240 Volts AC. 50/60 Hz
Dimensions:	18" D x 15" W x 7"H (46 cm x 38 cm x 18 cm)
Weight:	20 lbs (8.9 kg)

### Regulatory

In Vitro Diagnostic use configurations available. CE and TUV marked, RoHS compliant.

Performance values represent the average observed factory test values. Specifications subject to change.



BioTek Instruments, Inc.  
Highland Park, P.O. Box 998  
Winooski, Vermont 05404-0998, USA

Phone: 802-655-4040 • Toll-Free: 888-451-5171  
Outside the USA: 802-655-4740

[www.biotek.com](http://www.biotek.com)